

DBX100 TYPE 5/6 DISPOSABLE COVERALL

TYPE 5/6 BASE COVERALL

Base protection against airborne particles and fibres. Limited protection against splash of LOW RISK chemicals. Zip front with adhesive back covered flap. Elasticated hood, cuffs and ankle closures to limit dust ingress. Tested anti-static dissipative clothing EN1149-5. Conforms to CE CAT III, type 5/6.




WITH
**SMS
FABRIC**

TECHNICAL INFORMATION

träega^{tech}
PERFORM

ORDER REF. #	DBX100
COLOURS AVAILABLE:	WHITE
SIZES AVAILABLE:	M, L, XL, 2XL, 3XL
TYPICAL APPLICATIONS:	General Industrial Clean-up and processing, Grease (general), Building cleaning, machine or vehicle maintenance
MATERIAL:	SMS 100% POLYPROPYLENE
PER CASE:	50 PIECES (INDIVIDUAL POLYBAG)
PER PACK:	1 PIECE PER POLYBAG

TECHNICAL INFORMATION:

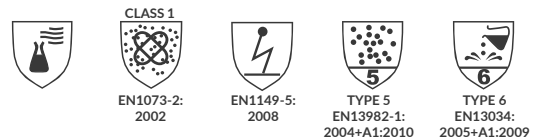

CERTIFICATION:

This product has been certified by: Centro Tessile Cotoniero e Abbigliamento S.p.A P.zza Sant'Anna, 2 - 21052, Busto Arsizio (VA) - Italia. **Notified body: 0624** in accordance with Regulation (EU) 2016/425 of the European Parliament and of the council of 9th March 2016. and has been shown to comply with the standards: EN13034:2005+A1:2009, EN ISO 13982-1:2004+A1:2010, EN1149-5:2008, EN1073-2:2002



ZIP FRONT



ELASTICATED OPENING



ANTI-STATIC TREATED



SINGLE USE



LIGHTWEIGHT

»» enhanced performance



Phone: +44 (0)1902 451 451
Email: sales@ultimateindustrial.co.uk
Web: traega.co.uk | ultimateindustrial.co.uk

PERFORMANCE - LEVELS AND CLASSES



Test on Fabric	Result	Class
EN 14605 + EN 13034 + EN 13982-1 + EN 1073-2		
Resistance to penetration (EN 13034 - EN ISO 6530)	H ₂ SO ₄ 30% < 1%	Class 3
	NaOH 10% < 1%	Class 3
	<i>o</i> -xylene < 1%	N.C.
	Butan-1-ol < 1%	N.C.
Repellency to Liquid (EN 13034 - EN ISO 6530)	H ₂ SO ₄ 30% > 95%	Class 3
	NaOH 10% > 95%	Class 3
	<i>o</i> -xylene - 90%-95%	N.C.
	Butan-1-ol - 90%-95%	N.C.
Abrasion Resistance (EN 530 meth2)	10-100 Cycles	Class 1
Trapezoidal tear resistance (EN ISO 9073-4)	20 - 40N	Class 2
Tensile strength (EN ISO 13934-1)	60 - 100N	Class 2
Puncture resistance (EN 863 - EN 1073-2)	10 - 50N	Class 2
Flex cracking resistance (EN ISO 7854 method B)	> 15,000 < 15000 C	Class 3
Blocking resistance (EN25978 - EN1073-2)		Pass
Ignition and Flammability		Pass
(EN13274-4 - EN1073-2)		
Surface Resistance (EN 1149-1)	≤ 2.5 x 10 ⁹ Ω	Pass
pH (EN ISO 13688 - ISO 3071)	3.5 > pH > 9.5	Pass

Test on Whole Suit	Result	Class
EN 14126		
Resistance to liquid penetration spray test - type 6 (EN ISO 17491-4 Met. A - EN 13034)		Pass
Resistance to aerosol penetration inward leakage type 5 (EN ISO 13982-2 - EN ISO 13982)	Ljmn 82/90 ≤ 30% Ls 8/10 ≤ 15%	Pass
Nominal Protection Factor (EN ISO 13982-2 - EN 1073-2)	TILE% TILA%	Class 1
Practical Performance Test (EN1073-2)		Pass
Seams Strength (EN ISO 13935-2)	75-125N	Class 3

GARMENT MARKINGS:

FRONT


BACK

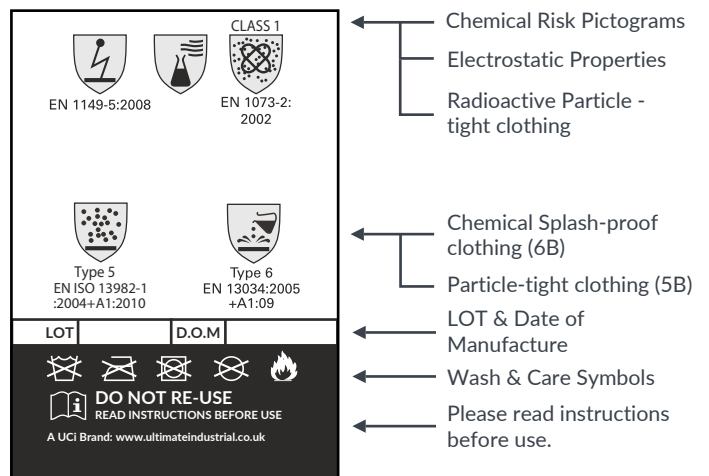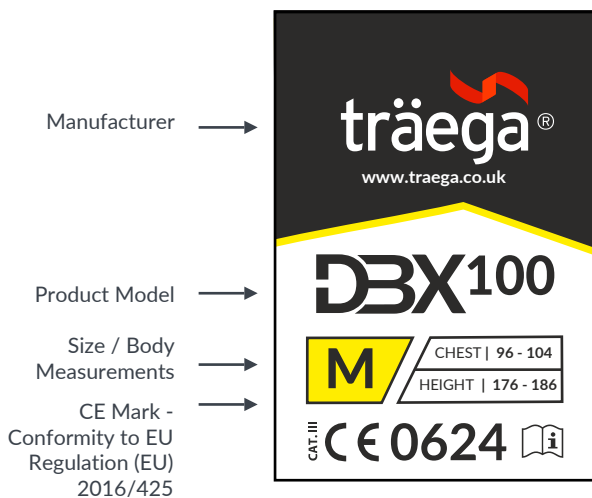

FITTING INSTRUCTIONS:

For a correct fit, please use the träega size guide for measurements and fitting tips. All conversions are approximate and fits may vary by style or personal preference.

SIZE	CHEST (CM) (A)	HEIGHT (CM) (B)
S	92-100	173-183
M	96-104	176-186
L	100-108	179-189
XL	108-116	182-192
2XL	112-120	185-195
3XL	116-124	188-198



STORAGE:

The item should be stored in a cool, dry place away from sources of light and heat.

WASH CARE:



MAINTENANCE:

Disposable item – Not suitable for re-use. Do not wash or dry clean. The garment should be worn fastened at all times to provide the correct level of protection stated. Do not attempt to repair damaged garments. Garment lifetime depends on: usage, care storage, number of washes etc. See enclosed user instruction sheet for more information. **Disposal:** If not contaminated the product can be treated as normal waste. If contaminated it should be treated as hazardous material and disposed of accordingly, complying with local or country laws. **Expiration:** It is suggested that the product be used within a period of five years from the date of production written on label.

... If appropriate to the product, EC/EU Declaration of Conformities, relevant certification and supporting documentation are available to access through your distributor, at the below web address(s) or by contacting Traega / UCI customer services.

... This document and any other statement provided herein by or on behalf of Traega / UCI are given for informational purposes and do not constitute a contractual agreement nor warranty of merchantability. Traega / UCI assumes no responsibility for the suitability or adequacy of an end user's selection of product for a specific purpose.

TDBX100-FEB19 REV2

