

DBX103 TYPE 5/6 DISPOSABLE COVERALL

TYPE 5/6 BASE COVERALL

Base protection against airborne particles and fibres. Limited protection against splash of LOW RISK chemicals. Zip front with adhesive back covered flap. Elasticated hood, cuffs and ankle closures to limit dust ingress. Tested anti-static dissipative clothing EN1149-5. Conforms to CE CAT III, type 5/6.




WITH
SMS
FABRIC

TECHNICAL INFORMATION

träega^{tech}
PERFORM

ORDER REF. #	DBX103
COLOURS AVAILABLE:	BLUE, WHITE
SIZES AVAILABLE:	M, L, XL, 2XL, 3XL
TYPICAL APPLICATIONS:	General Industrial Clean-up and processing, Grease (general), Building cleaning, machine or vehicle maintenance
MATERIAL:	SMS 100% POLYPROPYLENE
PER CASE:	50 PIECES (INDIVIDUAL POLYBAG)
PER PACK:	1 PIECE PER POLYBAG

TECHNICAL INFORMATION:

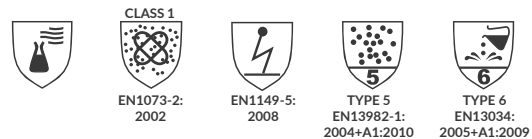

CERTIFICATION:

This product has been certified by: Centro Tessile Cotoniero e Abbigliamento S.p.A P.zza Sant'Anna, 2 - 21052, Busto Arsizio (VA) - Italia. **Notified body: 0624** in accordance with Regulation (EU) 2016/425 of the European Parliament and of the council of 9th March 2016, and has been shown to comply with the standards: EN13034:2005+A1:2009, EN ISO 13982-1:2004+A1:2010, EN1149-5:2008, EN1073-2:2002



ZIP FRONT



ELASTICATED OPENING



ANTI-STATIC TREATED



SINGLE USE



LIGHTWEIGHT

»» enhanced performance



Phone: +44 (0)1902 451 451
Email: sales@ultimateindustrial.co.uk
Web: traega.co.uk | ultimateindustrial.co.uk

PERFORMANCE - LEVELS AND CLASSES

Test on Fabric	Result	Class
EN 14605 + EN 13034 + EN 13982-1 + EN 1073-2		
Resistance to penetration (EN 13034 - EN ISO 6530)	H ₂ SO ₄ 30% < 1%	Class 3
	NaOH 10% < 1%	Class 3
	<i>o</i> -xylene < 1%	N.C.
	Butan-1-ol < 1%	N.C.
Repellency to Liquid (EN 13034 - EN ISO 6530)	H ₂ SO ₄ 30% > 95%	Class 3
	NaOH 10% > 95%	Class 3
	<i>o</i> -xylene - 90%-95%	N.C.
	Butan-1-ol - 90%-95%	N.C.
Abrasion Resistance (EN 530 meth2)	10-100 Cycles	Class 1
Trapezoidal tear resistance (EN ISO 9073-4)	20 - 40N	Class 2
Tensile strength (EN ISO 13934-1)	60 - 100N	Class 2
Puncture resistance (EN 863 - EN 1073-2)	10 - 50N	Class 2
Flex cracking resistance (EN ISO 7854 method B)	> 15,000 < 15000 C	Class 3
Blocking resistance (EN25978 - EN1073-2)		Pass
Ignition and Flammability (EN13274-4 - EN1073-2)		Pass
Surface Resistance (EN 1149-1)	≤ 2.5 x 10 ⁹ Ω	Pass
pH (EN ISO 13688 - ISO 3071)	3.5 > pH > 9.5	Pass

Test on Whole Suit	Result	Class
EN 14126		
Resistance to liquid penetration spray test - type 6 (EN ISO 17491-4 Met. A - EN 13034)		Pass
Resistance to aerosol penetration inward leakage type 5 (EN ISO 13982-2 - EN ISO 13982)	Ljmn 82/90 ≤ 30% Ls 8/10 ≤ 15%	Pass
Nominal Protection Factor (EN ISO 13982-2 - EN 1073-2)	TILE% TILA%	Class 1
Practical Performance Test (EN1073-2)		Pass
Seams Strength (EN ISO 13935-2)	75-125N	Class 3

GARMENT MARKINGS:

FRONT

BACK

Manufacturer →

Product Model →

Size / Body Measurements →

CE Mark - Conformity to EU Regulation (EU) 2016/425 →

Chemical Risk Pictograms

Electrostatic Properties

Radioactive Particle - tight clothing

Chemical Splash-proof clothing (6B)

Particle-tight clothing (5B)

LOT & Date of Manufacture

Wash & Care Symbols

Please read instructions before use.

