

Product Datasheet model uvex super OTG 9169 081

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- classic overspecs for prescription spectacle wearers with an innovative temple concept and a flat lens that offers a wide field of vision
- flexible side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – extremely scratch-resistant lens on both sides
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- metal-free


2. Technical Details Body**Front piece**

Material	PA
Colour	black

Temple

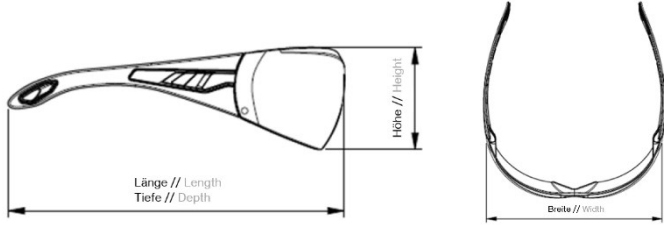



Material	PA/TPE
Colour	black, light grey

Marking	
Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens	
Material	PC
Thickness	2.1 mm at PD
Coating	uvex supravision sapphire
Colour	grey 23%
UV protection	UV400
Marking according to EN	
Filter	5-2.5 (EN 172)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	37g		
Dimensions (L x W x B) in approx. mm	 <p style="text-align: right;">picture only for reference</p>		
	80 x 153 x 58		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4031101419114		
Quantity in pcs.	1	8	160
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>		
	80 x 155 x 54	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	37	304	5,920
Gross weight in approx. g	51	510	11,120
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166 + EN 172
PPE Category	Category II