

Product Datasheet model uvex ultravision 9301 605

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- classic safety goggle suitable for a wide range of applications
- flexible face seal naturally moulds to any facial shape
- generous internal volume accommodating prescription spectacles and frame recesses to locate the side arms ensuring a comfortable fit
- indirect ventilation system increases air circulation
- length-adjustable textile headband for a secure fit and individual adaptability
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100% protection against dangerous UV radiation up to 400 nm
- metal-free

2. Technical Details Body

Frame

Material	PVC
Version	indirect ventilation
Colour	transparent grey

Headband

Material	synthetic
Features	individually adjustable
Colour	light grey, black


Headband Hooks

Material	PC
Colour	anthracite

Marking

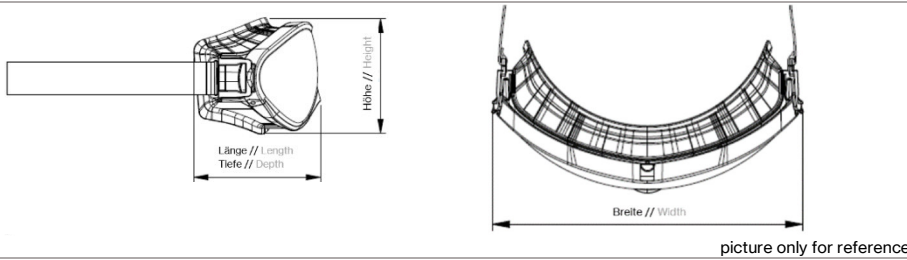
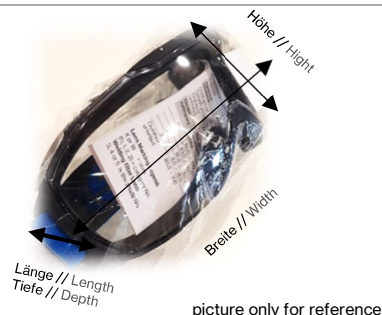
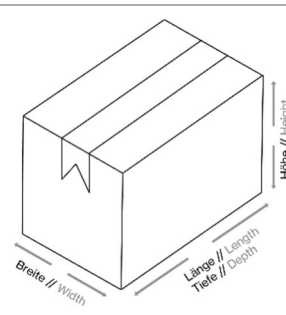
Manufacturer 's ID code	W
Applicable EN norm	166
Field of use	3 (drops and splashes of liquid) 4 (large dust particles)
Impact resistance	B (120 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

Material	PC
Thickness	2.2 mm at PD
Coating	uvex supravision plus
Colour	clear
UV protection	UV400
Marking	
Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	B (120 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	131g	
Dimensions (L x W x B) in approx. mm		
	95 x 196 x 91	
	Packing unit 1	Packing unit 2
EAN Code	4031101067933	4031101781532
Quantity in pcs.	1	90
Dimensions (L x W x H) in approx. mm		
	100 x 200 x 91	600 x 400 x 400
Net weight in approx. g	131	11,790
Gross weight in approx. g	149	14,310
Country of Origin	Czech Republic	

5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II